


WestLab Audio

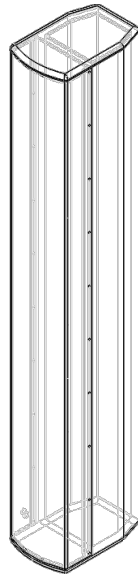

Product Data

6x5" Column Speaker

Series: LABSTREAK
Model: LABSTREAK p (passive)

Dimensions H 1160 x W 150 x D 225 mm

Local Box H - x W - x D mm

Export Box H - x W - x D - mm

Net weight 19,5 kg

Export boxed - kg

Power Handling (RMS/Program)

LF 500/1000 W

HF 240/1000 W

Nominal Impedance

3,3 Ohm

Frequency Range (-10dB)

58 Hz - 35 kHz

Crossover Frequency

1200 Hz

Directivity horizontal

90° / 120° optional mechanical adjustment)

Directivity vertical

8° / up to 18° F.I.R. beam steering

Maximum Output

LF 133dB @ 1000 W

HF 150dB @ 1000 W

Low Frequency Driver Chassis type

6 x ultra low distortion low midrange driver

Low Frequency Driver Magnet

Neodymium

Low Frequency Driver Chassis diameter

5" / 128 mm

Low Frequency Driver Voicecoil diameter

1,5" / 38 mm

High Frequency Driver Chassis type

3 x planar wave driver

High Frequency Driver Magnet

Neodymium

High Frequency Driver Chassis diameter

4" x 1" / 101,6 x 25,4 mm

High Frequency Driver Voicecoil diameter

1,75" / 44,4 mm