


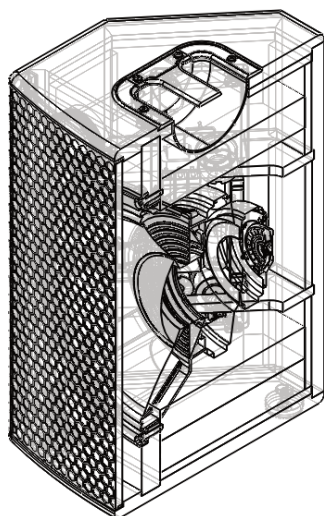

Product Data


12" Coax Top

Series: LAB
Model: LAB 12p (passive)

Dimensions H 476 x W 362 x D 308 mm
Local Box H 510 x W 375 x D 330 mm
Export Box H 570 x W 440 x D 395 mm
Net weight 20,5 kg
Export boxed 23,5 kg

Power Handling (RMS/Program/Peak)	500/1000/2000 W
Nominal Impedance	8 Ohm
Sensitivity (1W/1m)	97 dB
Max SPL (peak)	130 dB
Frequency Range (-6 dB)	65 Hz - 20 kHz
Crossover Frequency	1,34 kHz
Directivity (horizontal x vertical)	90° x 90°
Low Frequency Driver Chassis type	Cone driver, port loaded
Low Frequency Driver Magnet	Ceramic
Low Frequency Driver Chassis diameter	12" / 318 mm
Low Frequency Driver Voicecoil diameter	3" / 77 mm
High Frequency Driver Chassis type	Coaxial ringradiator compression driver
High Frequency Driver Magnet	Ceramic
High Frequency Driver Chassis diameter	1" / 25,4 mm
High Frequency Driver Voicecoil diameter	1,75" / 44,4 mm

Frequency response L 12p

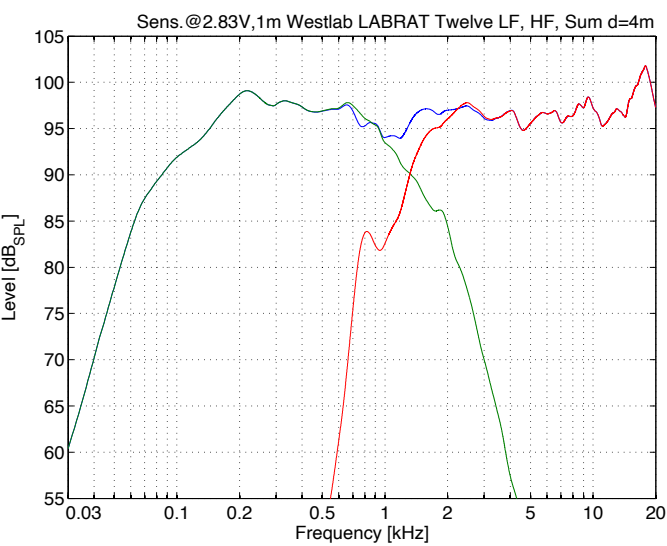

Horizontal Isobars L 12p

