


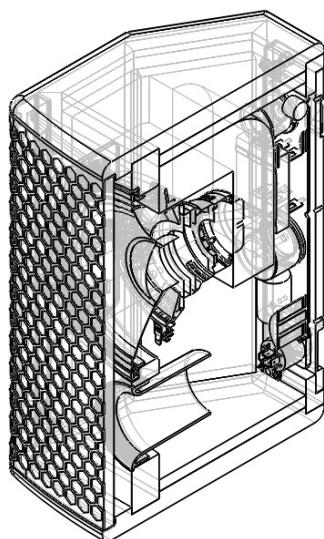

Product Data


6,5" Coax Top

Series: LABRAT
Model: LABRAT 6p (passive)

Dimensions H 325 x W 216 x D 220 mm
Local Box H 340 x W 240 x D 260 mm
Export Box H 390 x W 300 x D 330 mm
Net weight 6,5 kg
Export boxed 8,5 kg

Power Handling (RMS/Program/Peak)	130/200/400 W
Nominal Impedance	16 Ohm
Sensitivity (1W/1m)	91 dB
Max SPL (peak)	117 dB
Frequency Range (-6 dB)	68 Hz - 23,4 kHz
Crossover Frequency	2,18 kHz
Directivity (horizontal x vertical)	90° x 90°
Low Frequency Driver Chassis type	Cone driver, port loaded
Low Frequency Driver Magnet	Neodymium
Low Frequency Driver Chassis diameter	6,5" / 162 mm
Low Frequency Driver Voicecoil diameter	1,5" / 38 mm
High Frequency Driver Chassis type	Coaxial ringradiator compression driver
High Frequency Driver Magnet	Neodymium
High Frequency Driver Chassis diameter	3/4" / 19 mm
High Frequency Driver Voicecoil diameter	1" / 25,4 mm

Frequency response LR 6p

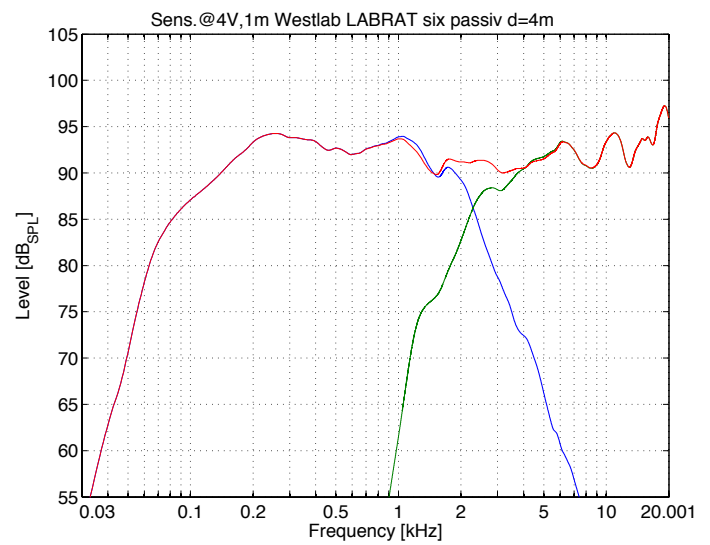

Horizontal Isobars LR 6p

