

Product Data

15"/1,5" coaxial 3-way Top

Series: LABTOP

Model: LABTOP 15.3p (passive)

! Pair only, left/right multi shaping !

Dimensions H 728 x W 436 x D 385 mm

Local Box H 760 x W 450 x D 410 mm


Export Box H 830 x W 500 x D 465 mm

Net weight 31 kg

Export boxed 34,5 kg

Power Handling (RMS/Program/Peak)	1000/1500/3000 W
Nominal Impedance	8 Ohm
Sensitivity (1W/1m)	99 dB
Max SPL (peak)	133 dB
Frequency Range (-6 dB)	48 Hz - 21 kHz
Crossover Frequency	700 Hz / 6,3 kHz
Directivity (horizontal x vertical)	60° x 40°
Low Frequency Driver Chassis type	Cone driver, port loaded
Low Frequency Driver Magnet	Neodymium
Low Frequency Driver Chassis diameter	15" / 388 mm
Low Frequency Driver Voicecoil diameter	4" / 101,6 mm
Mid Frequency Driver Chassis type	hornl. coaxial ringradiator compression driver
Mid Frequency Driver Magnet	Neodymium
Mid Frequency Driver Exit diameter	1,5" / 38,1 mm
Mid Frequency Driver Voicecoil diameter	3,5" / 90 mm
High Frequency Driver Chassis type	hornl. coaxial ringradiator compression driver
High Frequency Driver Magnet	Neodymium
High Frequency Driver Exit diameter	1,5" / 38,1 mm
High Frequency Driver Voicecoil diameter	1,75" / 44,4 mm

Frequency response LT 15.3p

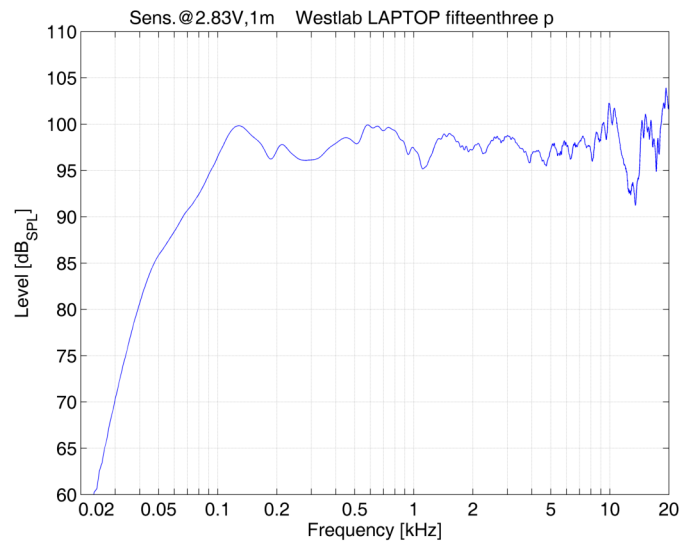

Horizontal Isobars LT 15.3p

