


WestLab Audio

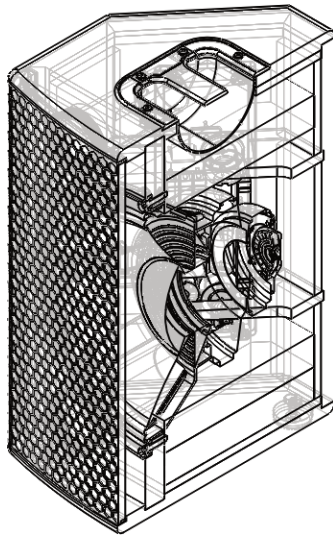

Product Data

12" Coax Top

Series: LAB

Model: LAB 12 (full active)

Dimensions H 476 x W 362 x D 308 mm

Local Box H 510 x W 375 x D 330 mm


Export Box H 570 x W 440 x D 395 mm

Net weight 21,5 kg

Export boxed 24,5 kg

| | |
|--|--|
| Total System Power (RMS/Peak) | 750/1150 W |
| Max SPL (program) | 130 dB |
| Max SPL (peak) | 136 dB |
| Crossover Type | Digital IIR Filter (internal with 5 Presets) |
| Frequency Range (-6 dB) | 63 Hz - 20,5 kHz |
| Crossover Frequency | 1,25 kHz |
| Directivity (horizontal x vertical) | 90° x 90° (1 kHz - 20 kHz) |
| Low Frequency Driver Chassis type | Cone driver, port loaded |
| Low Frequency Driver Magnet | Ceramic |
| Low Frequency Driver Chassis diameter | 12" / 318 mm |
| Low Frequency Driver Voicecoil diameter | 3" / 77 mm |
| High Frequency Driver Chassis type | Coaxial ringradiator compression driver |
| High Frequency Driver Magnet | Ceramic |
| High Frequency Driver Chassis diameter | 1" / 25,4 mm |
| High Frequency Driver Voicecoil diameter | 1,75" / 44,4 mm |

Frequency response LR 12

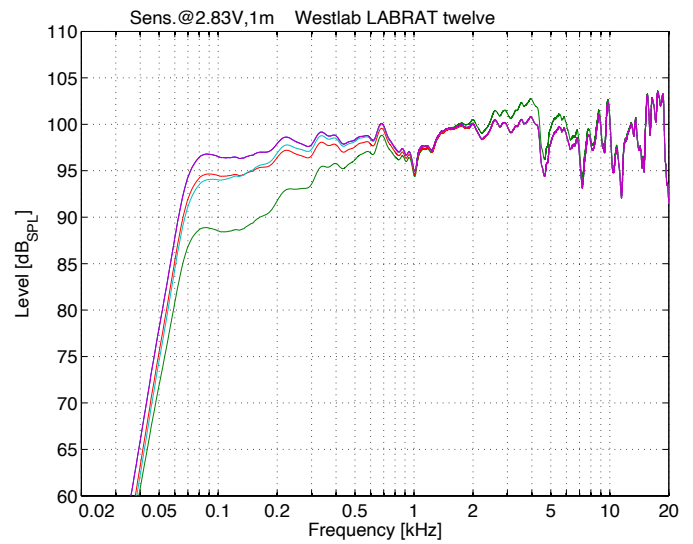

Horizontal Isobars LR 12

