


# WestLab Audio

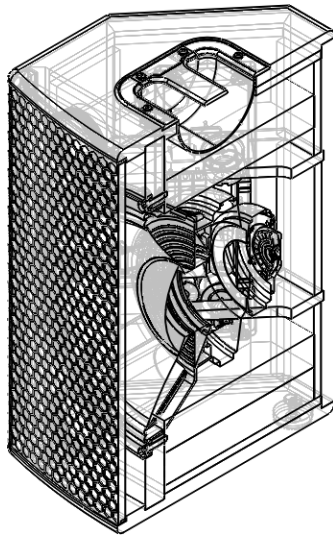

## Product Data

12" Coax Top

Series: LABRAT

Model: LABRAT 12 (full active)

Dimensions H 476 x W 362 x D 308 mm

Local Box H 510 x W 375 x D 330 mm

Export Box H 570 x W 440 x D 395 mm


Net weight 21,5 kg

Export boxed 24,5 kg

---

Total System Power (RMS/Peak)	750/1150 W
Max SPL (program)	130 dB
Max SPL (peak)	136 dB
Crossover Type	Digital IIR Filter (internal with 5 Presets)
Frequency Range (-6 dB)	63 Hz - 20,5 kHz
Crossover Frequency	1,25 kHz
Directivity (horizontal x vertical)	90° x 90° (1kHz - 20 kHz)
Low Frequency Driver Chassis type	Cone driver, port loaded
Low Frequency Driver Magnet	Ferrite
Low Frequency Driver Chassis diameter	12" / 318 mm
Low Frequency Driver Voicecoil diameter	3" / 77 mm
High Frequency Driver Chassis type	Coaxial ringradiator compression driver
High Frequency Driver Magnet	Ferrite
High Frequency Driver Chassis diameter	1" / 25,4 mm
High Frequency Driver Voicecoil diameter	1,75" / 44,4 mm

## Frequency response LR 12

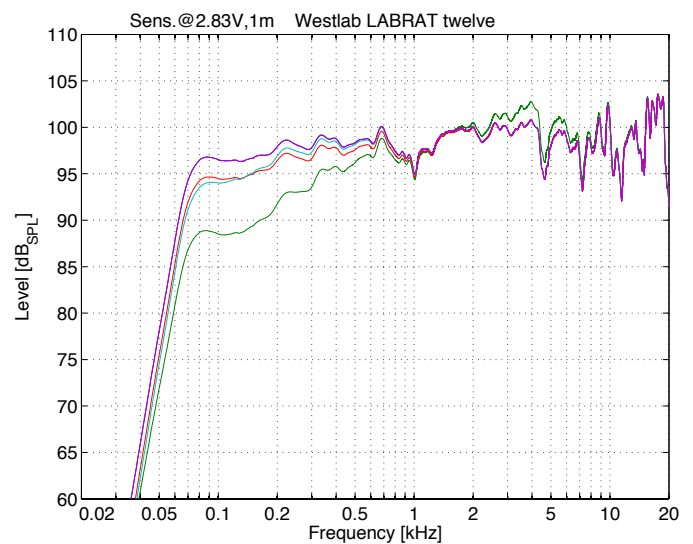

## Horizontal Isobars LR 12

